


APPARATUS FITTINGS

90° DISCHARGE & SUCTION SWIVEL ELBOWS

| FEMALE INLET SIZE / TYPE | | | MALE OUTLET | | | MOUNT OPTIONS | | MOUNTING SPACE | | TWIST LOCK | BUILT-IN STRAINER | BALL RACE | | MATERIAL | Weight (Lbs.) | MODEL | FIGURE |
|--------------------------|--------|------|-------------|----------|------|---------------|------|----------------|-----|------------|-------------------|-----------|-------|----------|---------------|-------|--------|
| (Inches) | SWIVEL | | | (Inches) | | | Stud | Flange | | | Single | Double | Brass | | | | |
| | NPT | NPSH | NHT | NHT | NPSH | NPT | | | | | | | | A | | | |
| 1.5 | • | | | 1.5 | | | | | 2.5 | 3.8 | | | • | • | 2.9 | 348 | 1 |
| | • | | | | | 1.5 | | | 2.5 | 3.8 | | | • | • | 2.9 | 348 | 1 |
| | • | | | 1.5 | | | | | 4.0 | 3.8 | | | • | | 3.5 | 348L | 2 |
| | | • | | 1.5 | | | | | 4.0 | 3.8 | | | • | | 3.5 | 348L | |
| 2.0 | • | | | 1.5 | | | | | 2.5 | 4.0 | | | • | • | 3.0 | 348 | 1 |
| | • | | | 1.5 | | | | | 4.0 | 4.0 | | | • | • | 3.7 | 348L | 2 |
| | • | | | | 1.5 | | | | 4.0 | 4.0 | | | • | • | 3.7 | 348L | 2 |
| | • | | | 1.5 | | | • | | 2.5 | 4.0 | | | • | • | 3.3 | 348M | |
| | • | | | 1.5 | | | • | | 4.0 | 4.0 | | | • | • | 3.4 | 348ML | 4 |
| | • | | | | 1.5 | | • | | 4.0 | 4.0 | | | • | • | 3.4 | 348ML | 4 |
| 2.5 | • | | | 2.5 | | | • | • | 5.0 | 6.2 | | | • | • | 11.8 | 348 | 1 |
| | • | | | 2.5 | | | • | • | 5.0 | 6.3 | | | • | • | 11.8 | 348M | 3 |
| 4.0 | • | | | | | 4.0 | | | 6.0 | 8.0 | s | | • | • | 30.3 | 348 | 5 |
| 5.0 | • | | | 5.0 | | | | | 6.8 | 9.5 | s | s | • | • | 45.0 | 348 | 5 |
| | • | | | 6.0 | | | | | 6.4 | 9.5 | s | s | • | • | 48.5 | 348 | 5 |


KEY s = standard o = option

ELBOW CONFIGURATIONS

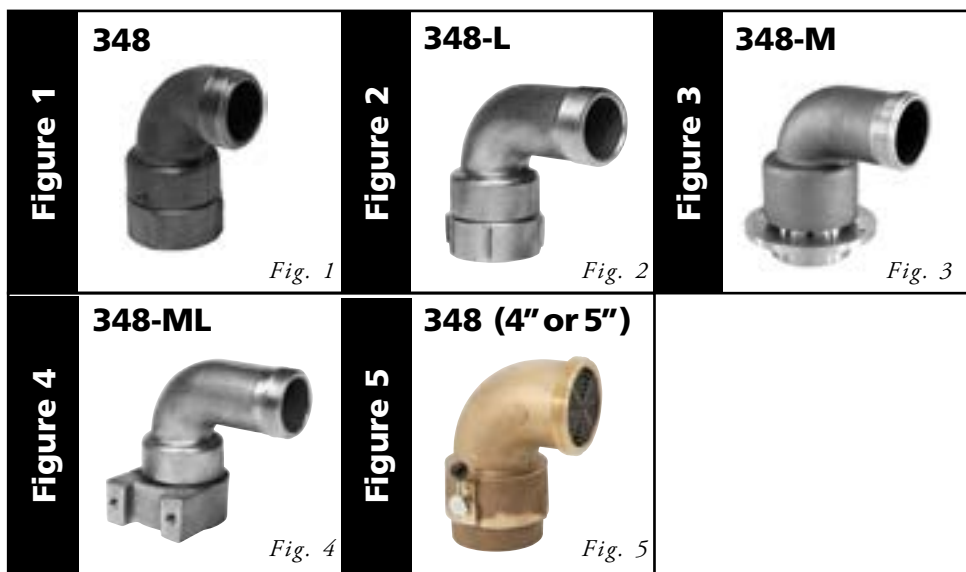

Figures depict general product types only and are not intended to be inclusive of all product features.

MOUNTING SPACE DIAGRAM

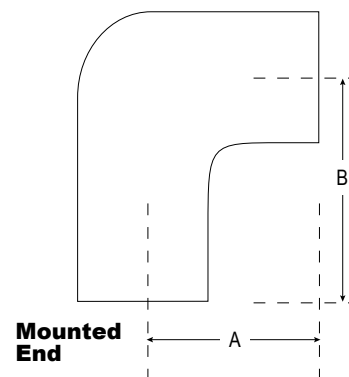

MOUNT OPTIONS

SIDE



FLANGE



OPTIONS

Polished and rough chrome finish are available on some brass models. Please inquire with our sales staff.

THREADS

All hose threads are NHT unless otherwise specified. See index T-13 for optional base threads.