




SELECT-O-FLOW®

MASTER STREAM

## Select-O-Flow®

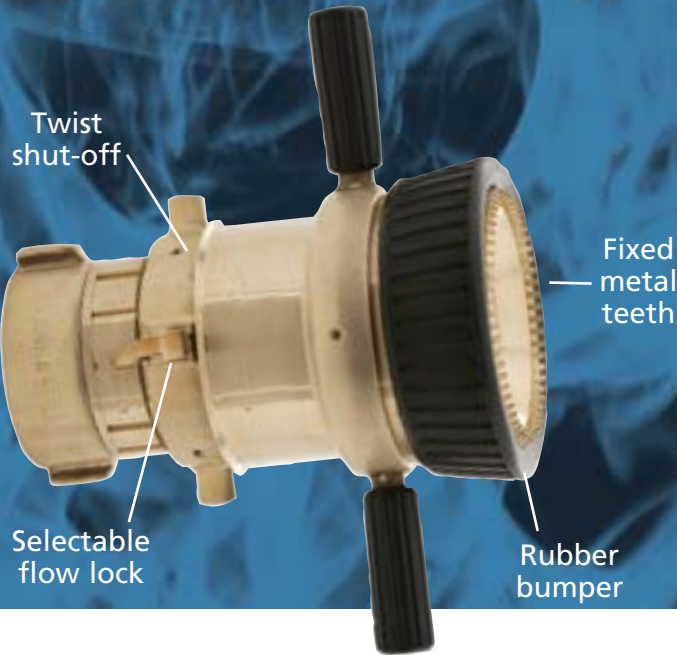

- Selectable flow rate, changeable even during flowing conditions
- Constant flow nozzle — straight stream, narrow fog (30°), or wide fog (90°)
- Flow efficient with a fully machined waterway for excellent stream quality
- Construction:
  - Elk-O-Lite® nozzles are hard anodized with chrome-plated trim and rubber bumper
  - Corrosion resistant brass nozzles have a heavy-duty protective rubber bumper
- Low maintenance components
- AFFF compatible

6-13

| Base Size | FLOW RATES  | PRESSURE   | MATERIAL |             | Effective Reach (feet) @ Highest Flow | Weight (Lbs.) | MODEL  | FIGURE |
|-----------|---|------------|----------|-------------|---------------------------------------|---------------|--------|--------|
|           |   |            | Brass    | Elk-O-Lite® |                                       |               |        |        |
| 2.5"      | GPM (LPM)   | 100 (6.89) |          |             |                                       |               |        |        |
|           | 300/550/750<br>(1136/2082/2839)                     |            | •        | •           | 221                                   | 7.6           | CSW    | 1      |
|           | 350/500/750/1000/1250<br>(1325/1893/2839/3785/4732) |            | •        | •           | 350                                   | 10.0          | CSW-L  | 1      |
|           |   |            | •        | •           | 350                                   | 21.4          | CSW-LB | 2      |

### SELECT-O-FLOW® CONFIGURATIONS

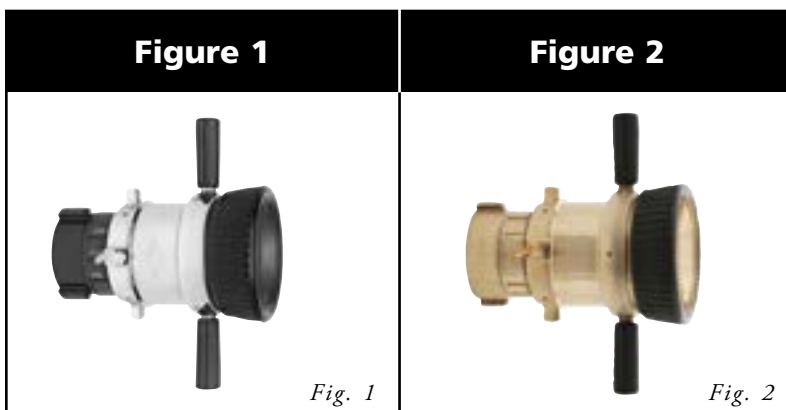


Fig. 1

Fig. 2

#### OPTIONS

#### THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads.