


**ELKHART  BRASS**

SAFE  FLEET  
*Driving Safety Forward™*

**FROM THE  
SYSTEM TO THE  
STREAM  
STANDPIPE ESSENTIALS**

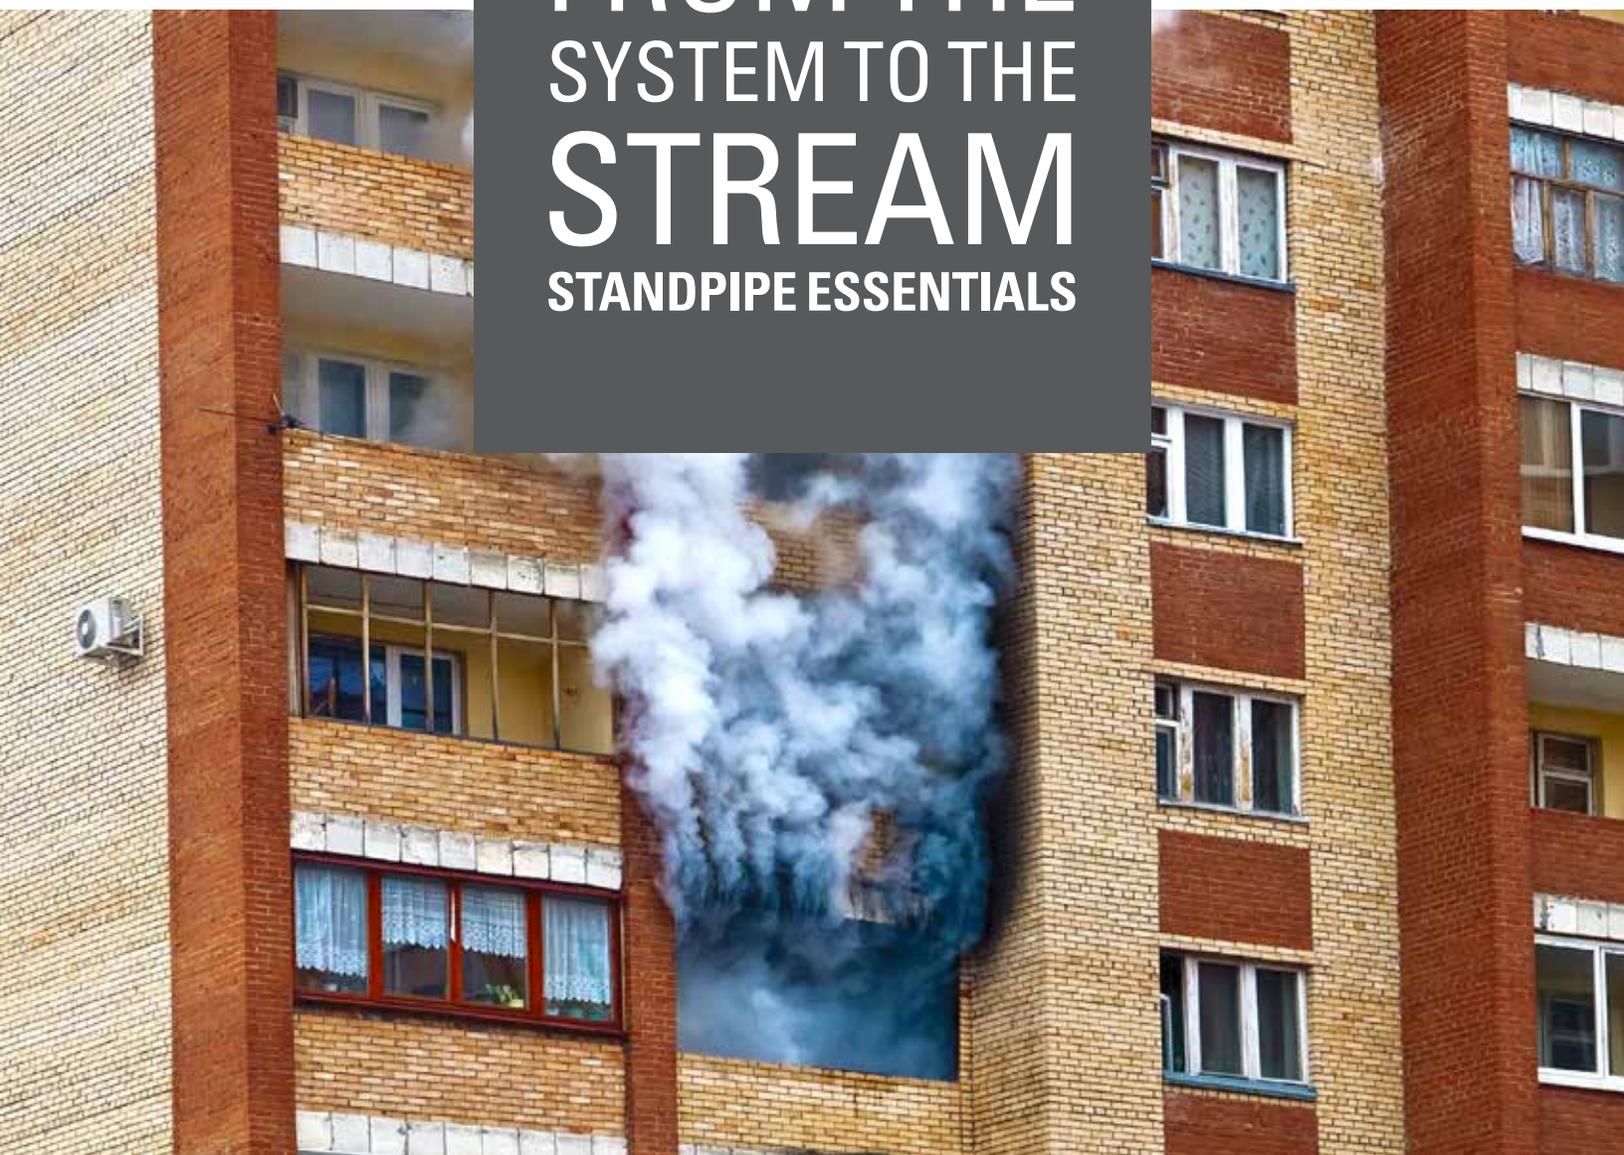

### Model 105A Drain Elbow

- 45 degree design reduces hose kinks
- Built in drain works in any position
- Free swivel inlet allows movement
- Lightweight aluminum, 2.00 lbs (.9 kg)



### Model 555A Standpipe Flowmeter

- Accurate digital readout of flow and pressure up to 250 gpm / 250 psi (946 lpm / 17.23 bar)
- Rechargeable 9V battery powered
- 5 hours use per charge with low battery indication and standby mode
- Lightweight aluminum, 5.25 lbs (2.4 kg)



### Break Aparts

#### 1.5" XD Shutoff with Integrated Smooth Bore & Chief XD Fog Tip (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Integrated Smooth Bore Shutoff operates at low pressure and can pass large debris, also ideal for extend operations
- Fog tip available in variety of flow and pressure configurations

\*Note: Many options available, above represents most popular nozzle configurations



### 2" Attack Packages

#### 1.5" XD Shutoff with 188-XD Long Barrel Smooth Bore (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Tip features protective bumper and laser etched flow rate
- Operates at low tip pressures and can pass through large debris
- Preferred size: 1 1/16" (27 mm) flows 240 gpm (908 lpm) @ 50 psi (3.44 bar)



Digital Set Up



Analog Set Up

### 2 1/2" ATTACK PACKAGES

#### 2.5" XD Shutoff with 187-XD Short Barrel Smooth Bore (Shown)

- Shutoff features forged aluminum bale handle and full round ball
- Tip features protective bumper and laser etched flow rate
- Operates at low tip pressures and can pass through large debris
- Preferred size: 1 1/8" (29 mm) flows 265 gpm (1,003 lpm) @ 50 psi (3.44 bar)



### Model 228A Inline Pressure Gauge

- 0-200 psi (0-13.78 bar) phosphorescent air filled gauge
- Gauge cover for storing
- Free swivel inlet allows movement
- Lightweight aluminum, 2.85 lbs (1.3 kg)



### Model X86A Gate Valve

- Puts valve control in the hands of the fire attack teams
- Gate style valve function for easy adjustment for proper flow and pressure
- Lightweight aluminum, 5.5 lbs (2.5 kg)



### ADAPTERS



#### 111A Increaser

- 1.5" Female x 2.5" Male
- Ideal for extend operations
- Low profile knurling



#### 101A Reducer

- 2.5" Female x 1.5" Male "Plate" Style Reducer
- Swivel inlet
- Low profile knurling



#### 102A Reducer

- 2.5" Female x 1.5" Male "Bell" Style Reducer
- Swivel inlet
- Low profile knurling

# The Elkhart Standpipe Bag

- Custom designed specifically for standpipe operations
- Features several internal and external pockets ideal for door chocks, pipe wrenches, wire brushes, adapters, etc.
- Handles made of seat belt webbing with seat belt buckle fasteners
- Bag made of durable materials

## GET THE KIT!

### INCLUDES:

(1) Standpipe Bag

17" L x 9" W x 9" H  
(432 mm L x 229 mm W x 229 mm H)

(1) 228A Pressure Gauge

(1) 105A Elbow

(1) X-86A Gate Valve

(2) T-464 Spanner Wrenches



## URFA FIELD ADJUSTABLE PRESSURE REDUCING VALVE

### The Only Firefighter Friendly Valve On The Market!

- Nested spring design only requires a force of 15 ft/lbs compared to 75 ft/lbs of other valves
- Tamper proof Lexan protects valve settings from vandalism but can easily be removed by firefighting crews
- Adjustments can easily be made on the fly with a push rod at much less torque



See Videos at:

[www.brasstackshardfacts.com](http://www.brasstackshardfacts.com)

**ELKHART  BRASS**

1-2021

Copyright ©2021 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1-574-295-8330  
[elkhartbrass.com](http://elkhartbrass.com)

 **SAFE FLEET**  
Driving Safety Forward™